

EGRO ONE Quick Milk

High Volume Super Automatic Espresso Machine

ESPRESSO MACHINE SPECIFICATIONS:

The Egro ONE is a high volume fully automatic espresso machine with a touchscreen user interface. It features a stainless steel 18-gram patented brew group with advanced sealing technology. This makes the brew group the most durable in its class, reduces maintenance needs, and lowers the cost of ownership. The ONE uses dual Ditting™ grinders with stainless steel burrs for quick and consistent grinding. The body of the machine features stainless steel and ABS plastic construction. The ONE can easily deliver coffee and steam milk simultaneously and is designed to simplify your beverage workflow. The Quick Milk Fridge is the perfect companion to the EGRO ONE. It keeps milk at the ideal temperature and features smaller dimensions but makes a great aesthetic impact. Its housing is made from lightweight yet hard wearing materials, the stainless-steel door has a brushed finish, and it holds 1 gallon of milk.



STANDARD FEATURES:

- Standard 5.7" full-color touchscreen graphical user interface enables up to 48 drink selections
- Single milk pump system
- Quick Milk fridge 1-gallon countertop fridge with top or side access holes for milk delivery hoses. Milk is siphoned directly from the milk container
- Americano bypass enables machine to deliver authentic Americanos into a single cup
- Lowest cost of ownership of any fully automatic
- Premium espresso brewing
- Centralized hot water
- Stainless steel 18-gram patented brewing
- Single component two-piece dispensing outlet for easy cleaning
- 2-year parts warranty

ACCESSORIES IN THE BOX:

- Plastic grounds bin container
- One-month supply of daily cleaning products
- Milk container
- Container for daily cleaning
- User manual
- Foot extensions

OPTIONS:

Keypad User Interface: Simple 10-button keypad (16 products with shift option)

iSteam: Intelligent steam wand automatically froths and steams milk; shuts off at programmed changes

Self-Adjusting Grinder: Automatically adjusts the coffee grind size to compensate for environmental changes

Under Counter Grounds Chute: Chute that diverts ground coffee to an under the counter waste container (not available when an under the counter fridge is installed directly under the machine)

External Hot Water Outlet: Hot water delivered through a separate outlet to the right of the drink spout

Self-Service Package: Includes locks for hopper, grounds drawer, and fridge, as well as cup stopper pins for the drink tray


Powder Module: Enables machine to deliver up to two types of powder, such as chocolate for mocha and hot chocolate

SPACE REQUIREMENTS:

- Allow 1.5" clearance on all sides of the machine.
- Allow space to fill bean hoppers from the top 4" minimum 12" preferred
- Allow 24" x 5" for in-line filter. Filter can be mounted behind the machine or under the counter.

EGRO ONE Quick Milk

High Volume Super Automatic Espresso Machine

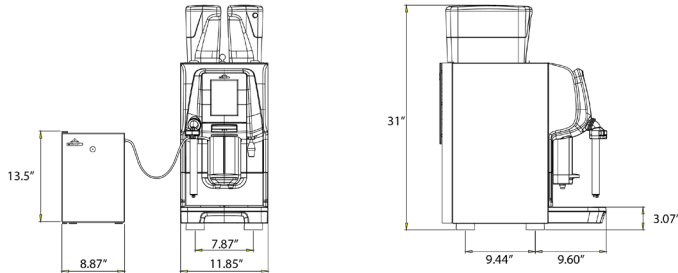


PLEASE NOTE: Power can be installed under or above counter. Please allow 3-4" of space for the plug, especially when placing power above the counter and behind the machine.

COUNTER REQUIREMENTS:

Width	Depth	Height	Weight
ESPRESSO MACHINE with QUICK MILK FRIDGE			
21"	23"	31"	156 lbs

SHIPPING DIMENSIONS AND WEIGHT:

Length	Width	Height	Weight
ESPRESSO MACHINE with QUICK MILK FRIDGE			
36"	36"	33"	222 lbs

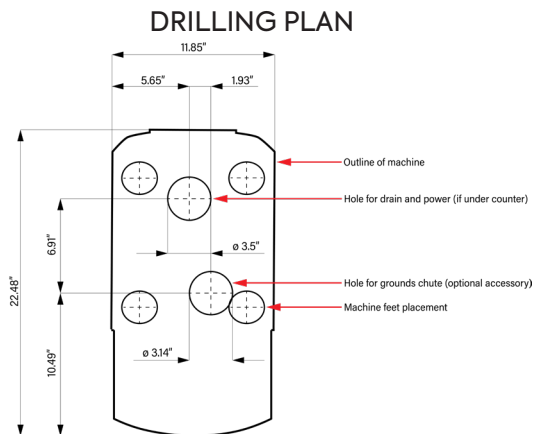


SERVICE CONNECTIONS:

Electrical Connections

ESPRESSO MACHINE

Voltage Range: 208-240 VAC Single Phase
 Watts: 6700 W
 Circuit Size: 30 amps
 Suggested Receptacle: NEMA L6-30R



QUICK MILK FRIDGE

Voltage Range: 110-120 VAC Single Phase
 Watts: 86 W
 Circuit Size: 15 amps
 Suggested Receptacle: 5-15R GFI

PLEASE NOTE: Egro coffee machines do not use a neutral line. A dedicated ground wire is required for proper performance.

WATER CONNECTIONS:

Dedicated cold water access line with standard female 3/8" NPT fitting and manual shut-off valve within 4' of the machine required.

DRAIN REQUIREMENTS:

Open gravity drain rain with minimum 2" I.D. within 4' of the machine.

WATER QUALITY STATEMENT:

The fact that water is potable is no guarantee that it is suitable for coffee machines. Your water supply must be within these general guidelines:

SUPPLY PRESSURE: 30-70 psi
HARDNESS: 2-3 GPG (1 grain of hardness = 17.1 ppm)

Water entering the machine should have a water hardness level of 2-3 GPG at all times. If the water supply is not within this range, a dedicated water softener (if above 3 GPG) or mineral addition cartridge (if below 2 GPG) is required for the coffee machine to operate properly over time (see Rancilio Group North America Water Quality Statement for further details).

